


INTERFACE	
1	VSS
2	VDD(5V)
3	V0
4	RS
5	RW
6	E
7	DB0
8	DB1
9	DB2
10	DB3
11	DB4
12	DB5
13	DB6
14	DB7
15	LED-A(5V)
16	LED-K

VER	DETIAL DISCRPTION	DATE
00	FIRST ISSUE	2016-9-7

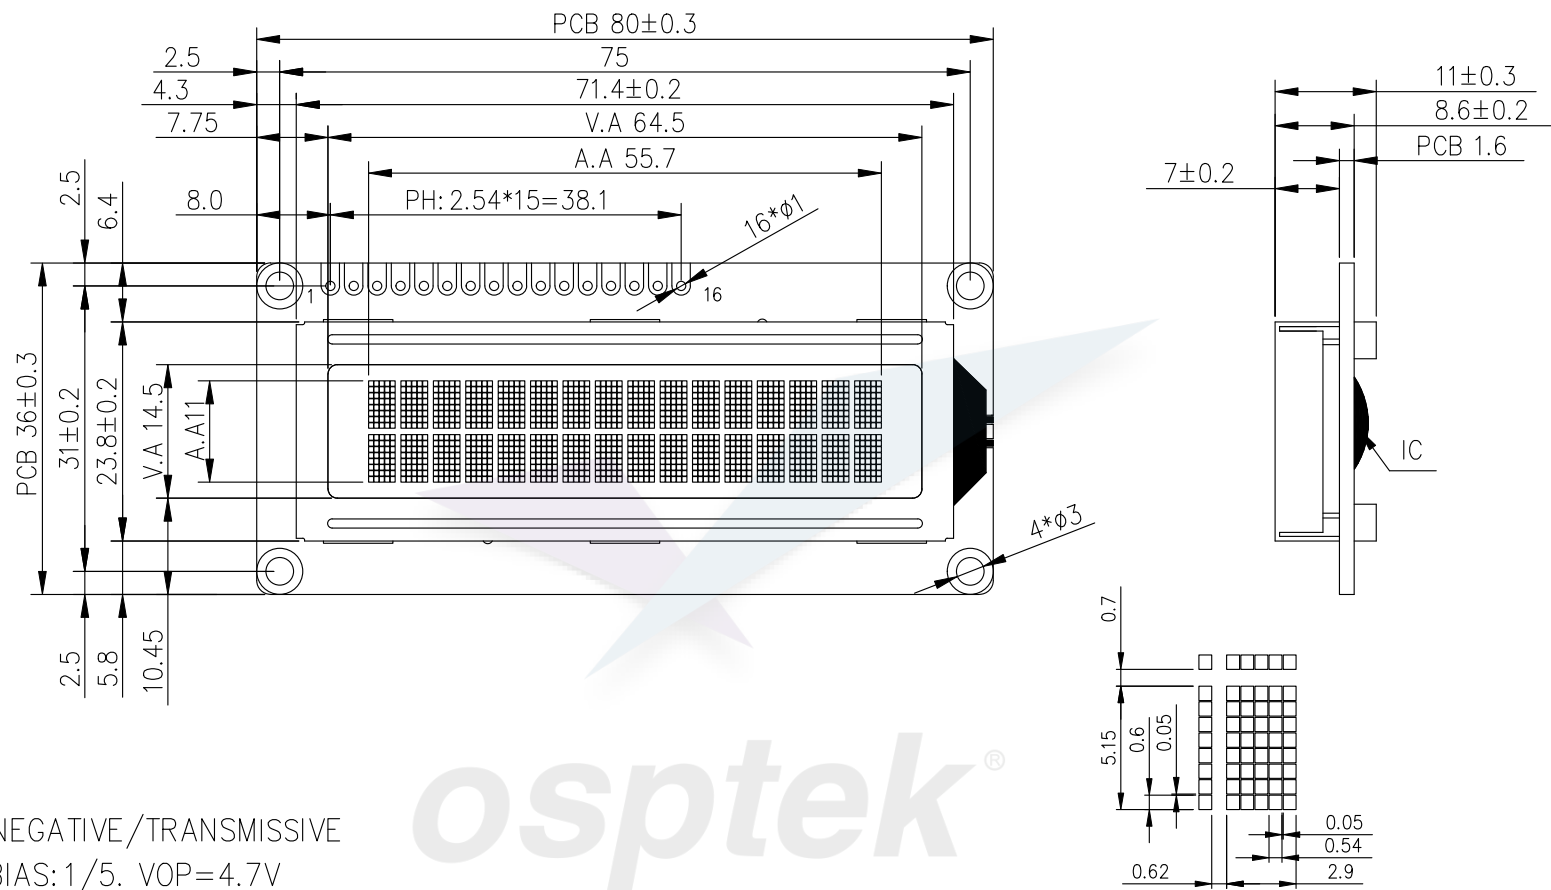

SPECIFICATION:

- 1).STN(BLUE ) /NEGATIVE/TRANSMISSIVE
- 2).DUTY:1/16. BIAS: 1/5. VOP=4.7V
- 3).VIEWING ANGLE: 6 O'CLOCK
- 4).OPERATING TEMPERATURE: -20~70℃  
STORAGE TEMPERATURE: -30~80℃
- 5).BACKLIGHT: WHITE I=20MA
- 6).DRIVE IC: AIP31066
- 7).DRIVE POWER: VDD=5.0V

osptek®

深圳鱼鹰光电科技有限公司  
Shenzhen Osprey Optoelectronics Technology Co., Ltd.

Unspecified Tolerance:	±0.20	UNITS: mm	DATE:	MODE NUMBER :		SHEET:	1 of 1
DESIGN BY:	WZQ	2016/9/7		LCM1602-8-B		DATE:	2016/9/7
CHECKED BY:				DO NOT SCALE THIS DRAWING.	PROJECTION		
CUSTOM NO:							