
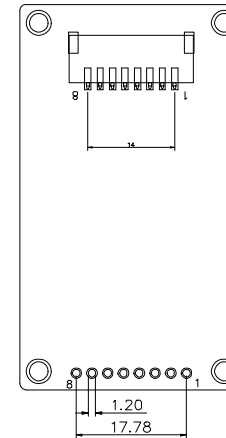
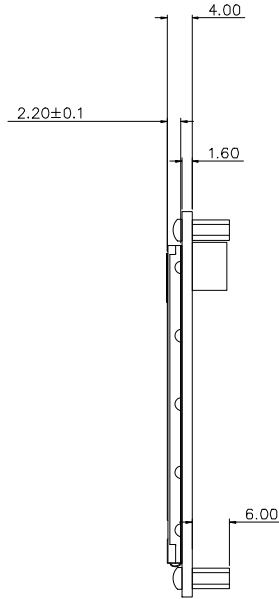


NO.	SYMBOL
1	GND
2	K
3	A
4	VCC
5	GND
6	GND
7	RS
8	CS
9	SCL
10	SDA
11	RESET
12	GND


接口支持: 4SPI

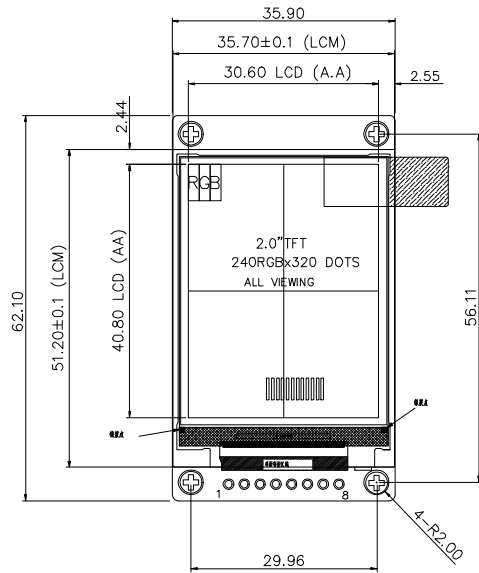

Pin	Symbol
1	VCC
2	GND
3	DIN
4	CLK
5	CS
6	DC
7	RST
8	BL

NOTES:

1. DISPLAY TYPE: 2.0"IPS TFT/TRANSMISSIVE/NORMALLY BLACK
2. VIEWING DIRECTION: All
3. DRIVER IC: ST7789V2
4. OPERATING TEMP.: -20°C~70°C
5. STORAGE TEMP.: -30°C~80°C
6. BACKLIGHT: 4 CHIP-WHITE LED
7. LCM Luminance: 400 CD/M2(TYP)
8. UNMARKED TOLERANCE: ±0.2
9. 建议机壳开窗可视区比 LCD A.A区单边大 0.3mm
10. 产品符合ROHS标准



Customer Approval Signature	Shenzhen Osprey Optoelectronics Technology Co., Ltd.						Drawing Number		Rev.	
									A	
	Unless Otherwise Specified		Title	YDP200HB001-P8				Material		
	Unit mm									
	General Roughness: 									
	Tolerance		Drawn	E.E.	Panel / E.	P.M.	Soda Lime / Polyimide			
	Dimension ±0.3		By							
Angle ±1		Date								Scale 1:1