




All Pages Of This Edition Approved

Signature:                      Date:

| REV. | DESCRIPTION | REVISER | DATE      |
|------|-------------|---------|-----------|
| A0   | First       | liugong | 2022-5-14 |
| A1   | 更改FPC       | liugong | 2022-5-18 |
| A2   | 更改FPC外形     | liugong | 2022-5-26 |

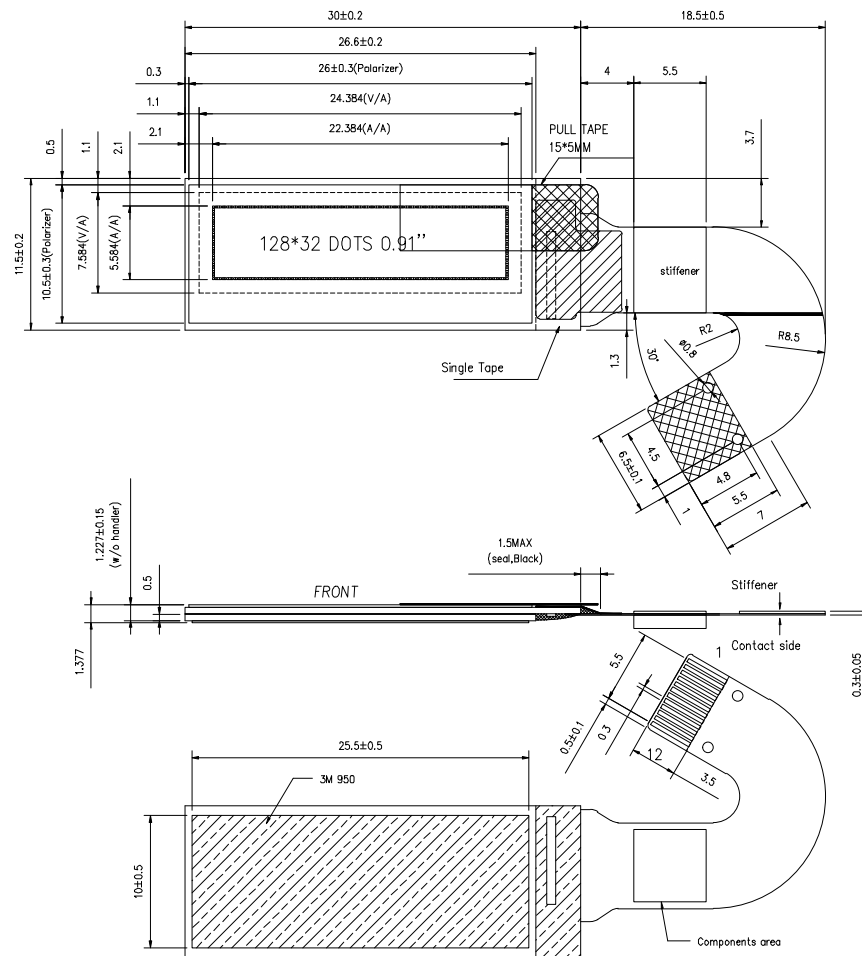


| PIN | SYMBOL |
|-----|--------|
| 1   | GND    |
| 2   | D2     |
| 3   | D1     |
| 4   | D0     |
| 5   | D/C#   |
| 6   | RES#   |
| 7   | CS#    |
| 8   | BS1    |
| 9   | BS0    |
| 10  | VDD    |
| 11  | VBAT   |
| 12  | GND    |

Specifications:

1. Display : OLED(White).
2. Dot Matrix: 128\*32
3. Dot Size: 0.159\*0.159mm
4. Dot Pitch: 0.175\*0.175mm
5. Aperture Rate: 82.5%
6. Active Area : 22.384\*5.584mm
7. Drive IC: SSD1306BZ
8. FPC P/N: HP12832-113 FPC-A0

深圳市鱼鹰光电科技有限公司  
Shenzhen Osprey Optoelectronics Technology Co., Ltd.

|                        |         |           |       |                            |                                                                                       |        |        |
|------------------------|---------|-----------|-------|----------------------------|---------------------------------------------------------------------------------------|--------|--------|
| Unspecified Tolerance: | ±0.20   | UNITS: mm | DATE: | MODEL NUMBER :             |  | SHEET: | 1 OF 1 |
| DESIGN BY:             | liugong | 2022-5-26 |       | OED091-12832W105-C12       |                                                                                       | SCALE: | 1 : 1  |
| CHECKED BY:            |         |           |       |                            |                                                                                       |        |        |
| APPROVED BY:           |         |           |       | DO NOT SCALE THIS DRAWING. |                                                                                       |        |        |